

**STATE OF MINNESOTA
RENVILLE COUNTY BOARD OF COMMISSIONERS
SEATED AS THE DRAINAGE AUTHORITY FOR RENVILLE COUNTY DITCH 59**

In the Matter of the Petition to Impound, Reroute, and Divert Renville County Ditch 59 (Kubeshes & Renville SWCD)	PETITION
---	-----------------

Pursuant to Minn. Stat. § 103E.227, Petitioners seek to impound, reroute, and divert a portion of Renville County Ditch 59. For their Petition, the undersigned Petitioners states and alleges the following:

1. Petitioners David & Margaret Kubesh are the owners of the following described real property currently within the benefitted area of County Ditch 59:

Property Owners/Address	Parcel I.D. #	Description
Kubesh/David & Margaret 85554 310 th St Danube, MN 56230	27-01720-00	27-116-35 NE4 – Ex BLDG SITE IN E2 OF NE4 - & W2 OF SE4 7 N2 OF NE4 OF SE4

2. Petitioner Renville County Soil and Water Conservation District is a political subdivision of the state of Minnesota that promotes sustainable use of water and soil resources through innovative and mutually beneficial conservation activities with local stakeholders.
3. To conserve and make a more adequate use of water resources, Petitioners requests that the Renville County Board of Commissioners, acting as the public drainage authority under Minnesota Statutes, chapter 103E for Renville County Ditch 59, impound, reroute, and divert the Renville County Ditch 59 Main Ditch within Sections 27 & 28 of Township 116 North, Range 35 West (Winfield Township), Renville County.
4. Attached hereto as **Exhibit A** is a concept plan for the proposed project, and a map that identifies the areas likely to be affected by the project. Attached hereto as **Exhibit B** is an engineer's estimates of cost of the proposed project.
5. The impound pond will provide temporary and permannet water storage for the CD 59 drianage system, which flows directly into Beaver Creek. The water storage and reduction in peak flows will reduce sediment and nutrients in CD 59 and Beaver Creek.
6. Petitioners anticipate a significant portion of the project costs will be paid for by a grant made available by the Board of Water and Soil Resources. Petitioners request that costs not covered by the grant funding be covered by the Renville County Ditch 59 drainage system funds.


7. In support of Petitioners request for drainage system funds, Petitioners note that the tile in Sections 27 & 28 of Winfield Township has been televised recently by the Renville County Drainage Authority and are in need of repair. Petitioners note that the proposed project will provide temporary and permanent water storage for the CD 59 system, providing a significant benefit to the CD 59 drainage system, and avoid the need for incurring repair costs.
8. Petitioners do not believe a public-waters-work permit or a water-use permit from the commissioner of natural resources is required under Minnesota Statutes, chapter 103G for the project.
9. Pursuant to Minnesota Statutes, section 103E.227, subd. 2(b), a bond is not required since this Petition is filed by the Renville County Soil and Water Conservation District.
10. Pursuant to Minnesota Statutes, section 103E.227, subds. 3-5, Petitioners request the Renville County Drainage Authority appoint an engineer to investigate the effect of the proposed installation and file a report of findings, and notice and conduct a public hearing on the Petition and report of findings.
11. The proposed project is of public and private benefit, and will not impair the utility of the Renville County Ditch 59 drainage system or deprive affected landowners of its benefit.
12. Petitioners David & Margaret Kubesh will cooperate with the Renville County Drainage Authority in granting the necessary rights-of-way and flowage easements for the proposed project.

Respectfully submitted as of the last date below, by Petitioners:



David Kubesh

Date: 12-14-24



Margaret Kubesh


Date: 12-14-24

Renville County Soil & Water Conservation District








By Phil Smith, Board Chair

Date: 12/12/2024

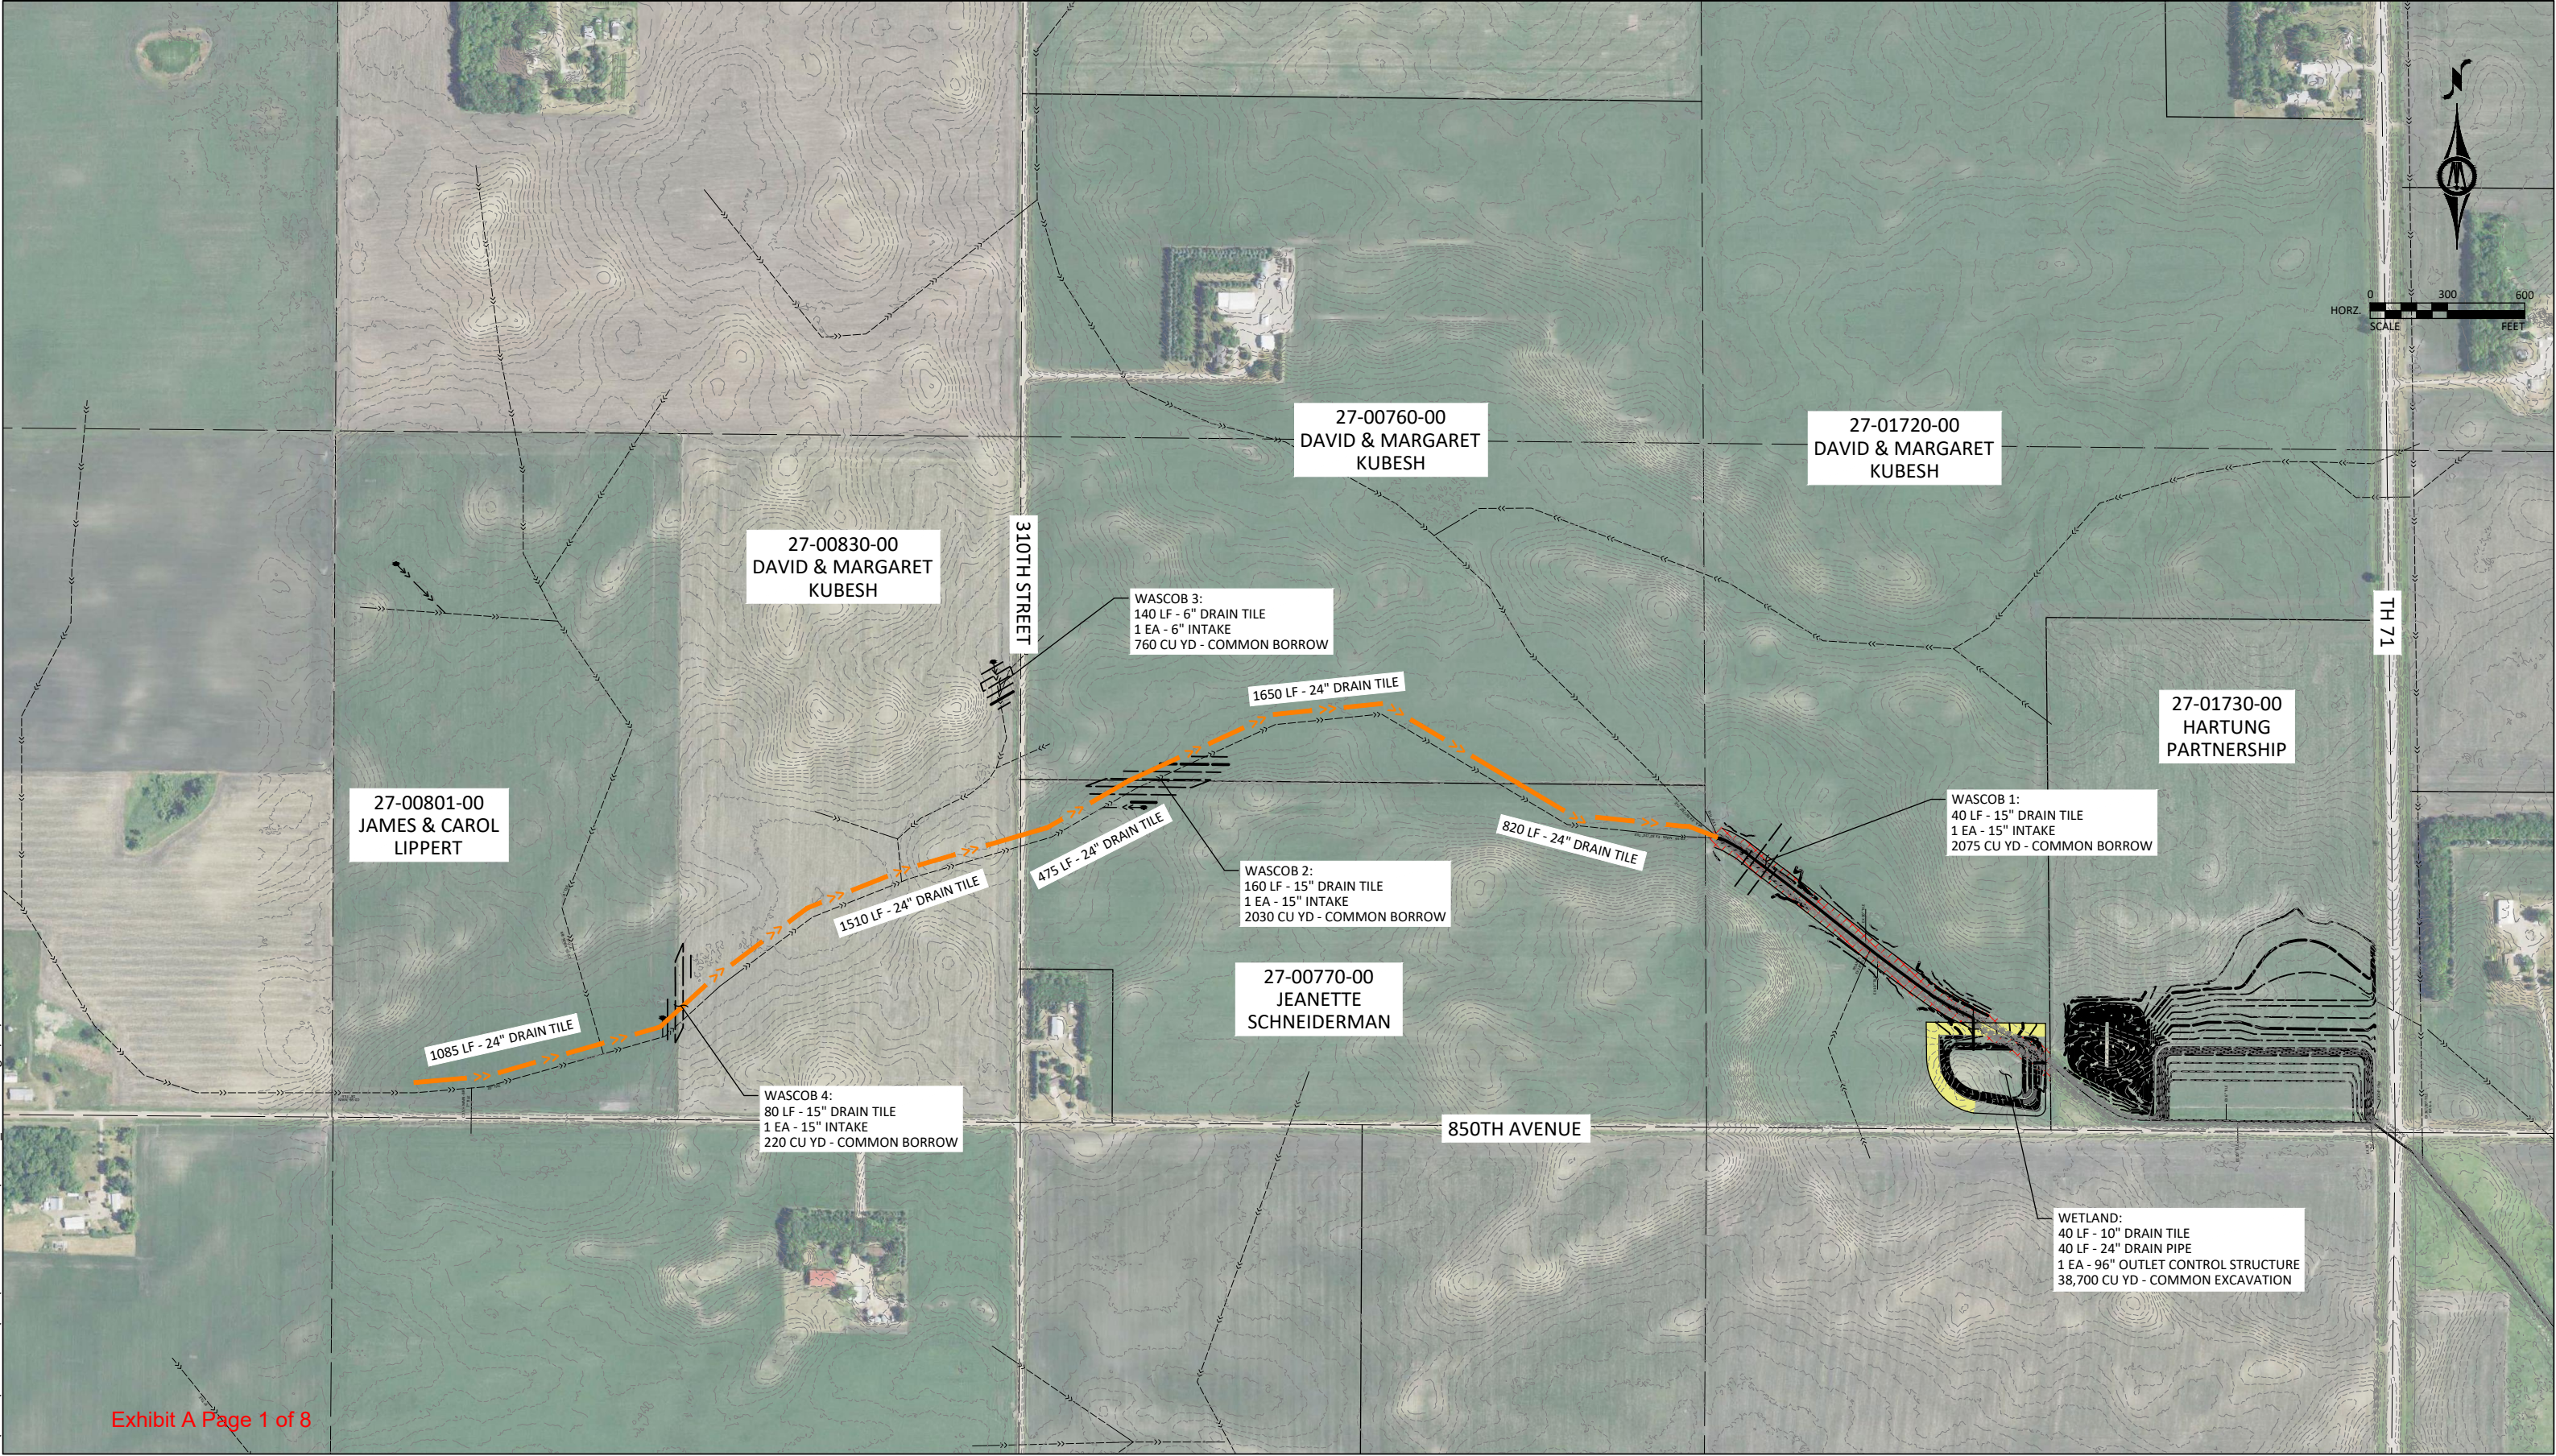



H:\RNC\515112473\CAD\2024 GRANT APP\112473 FIGURE.dwg 7/26/2024 2:42:03 PM

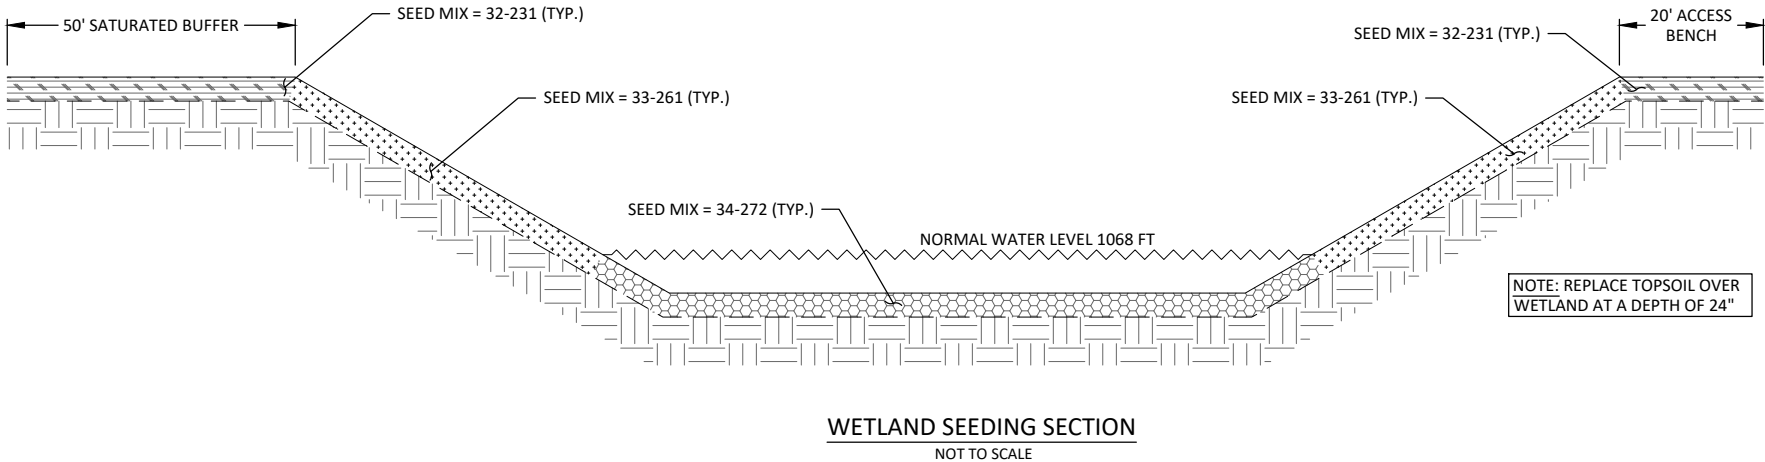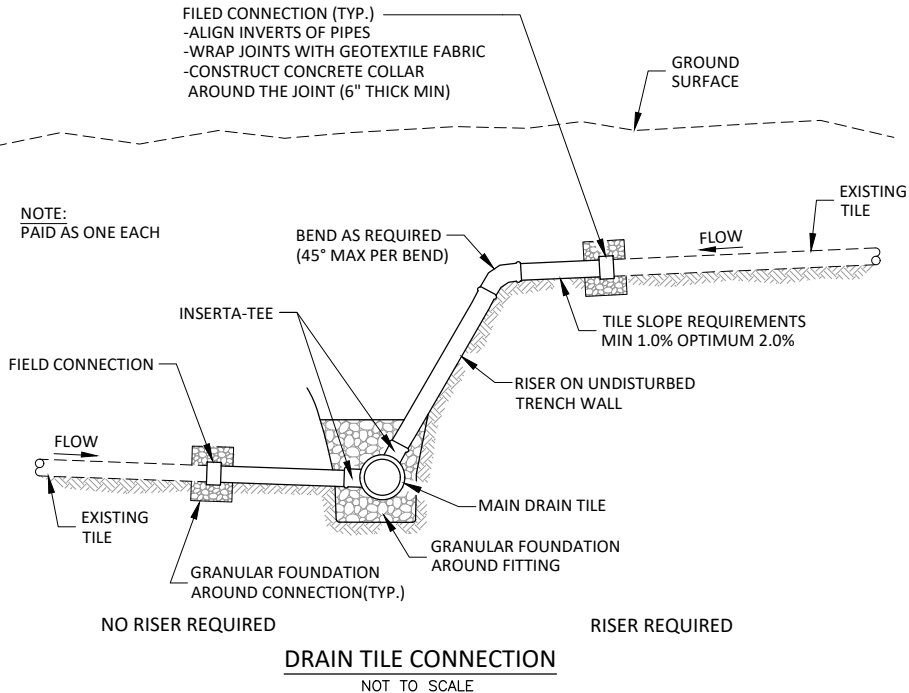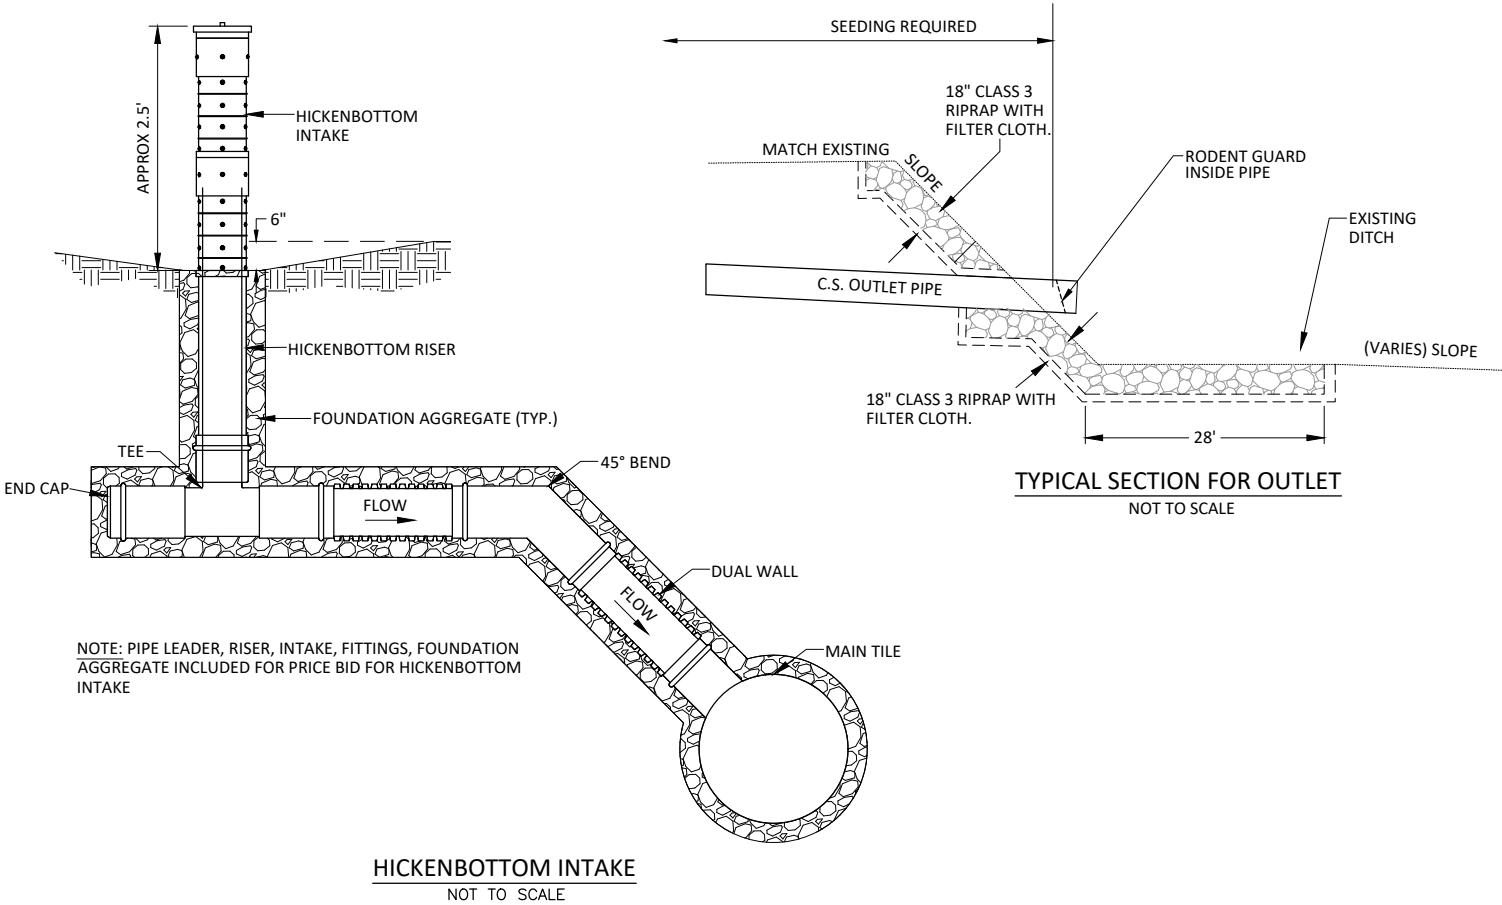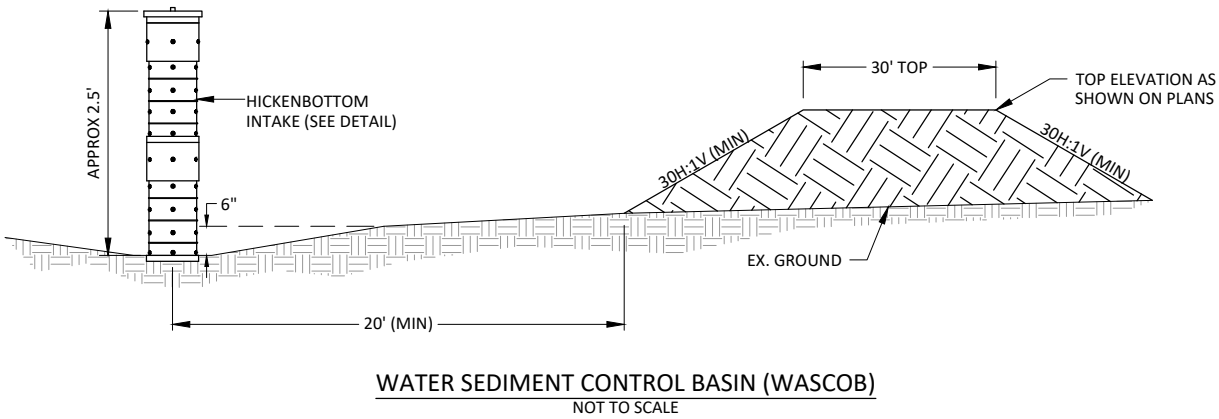


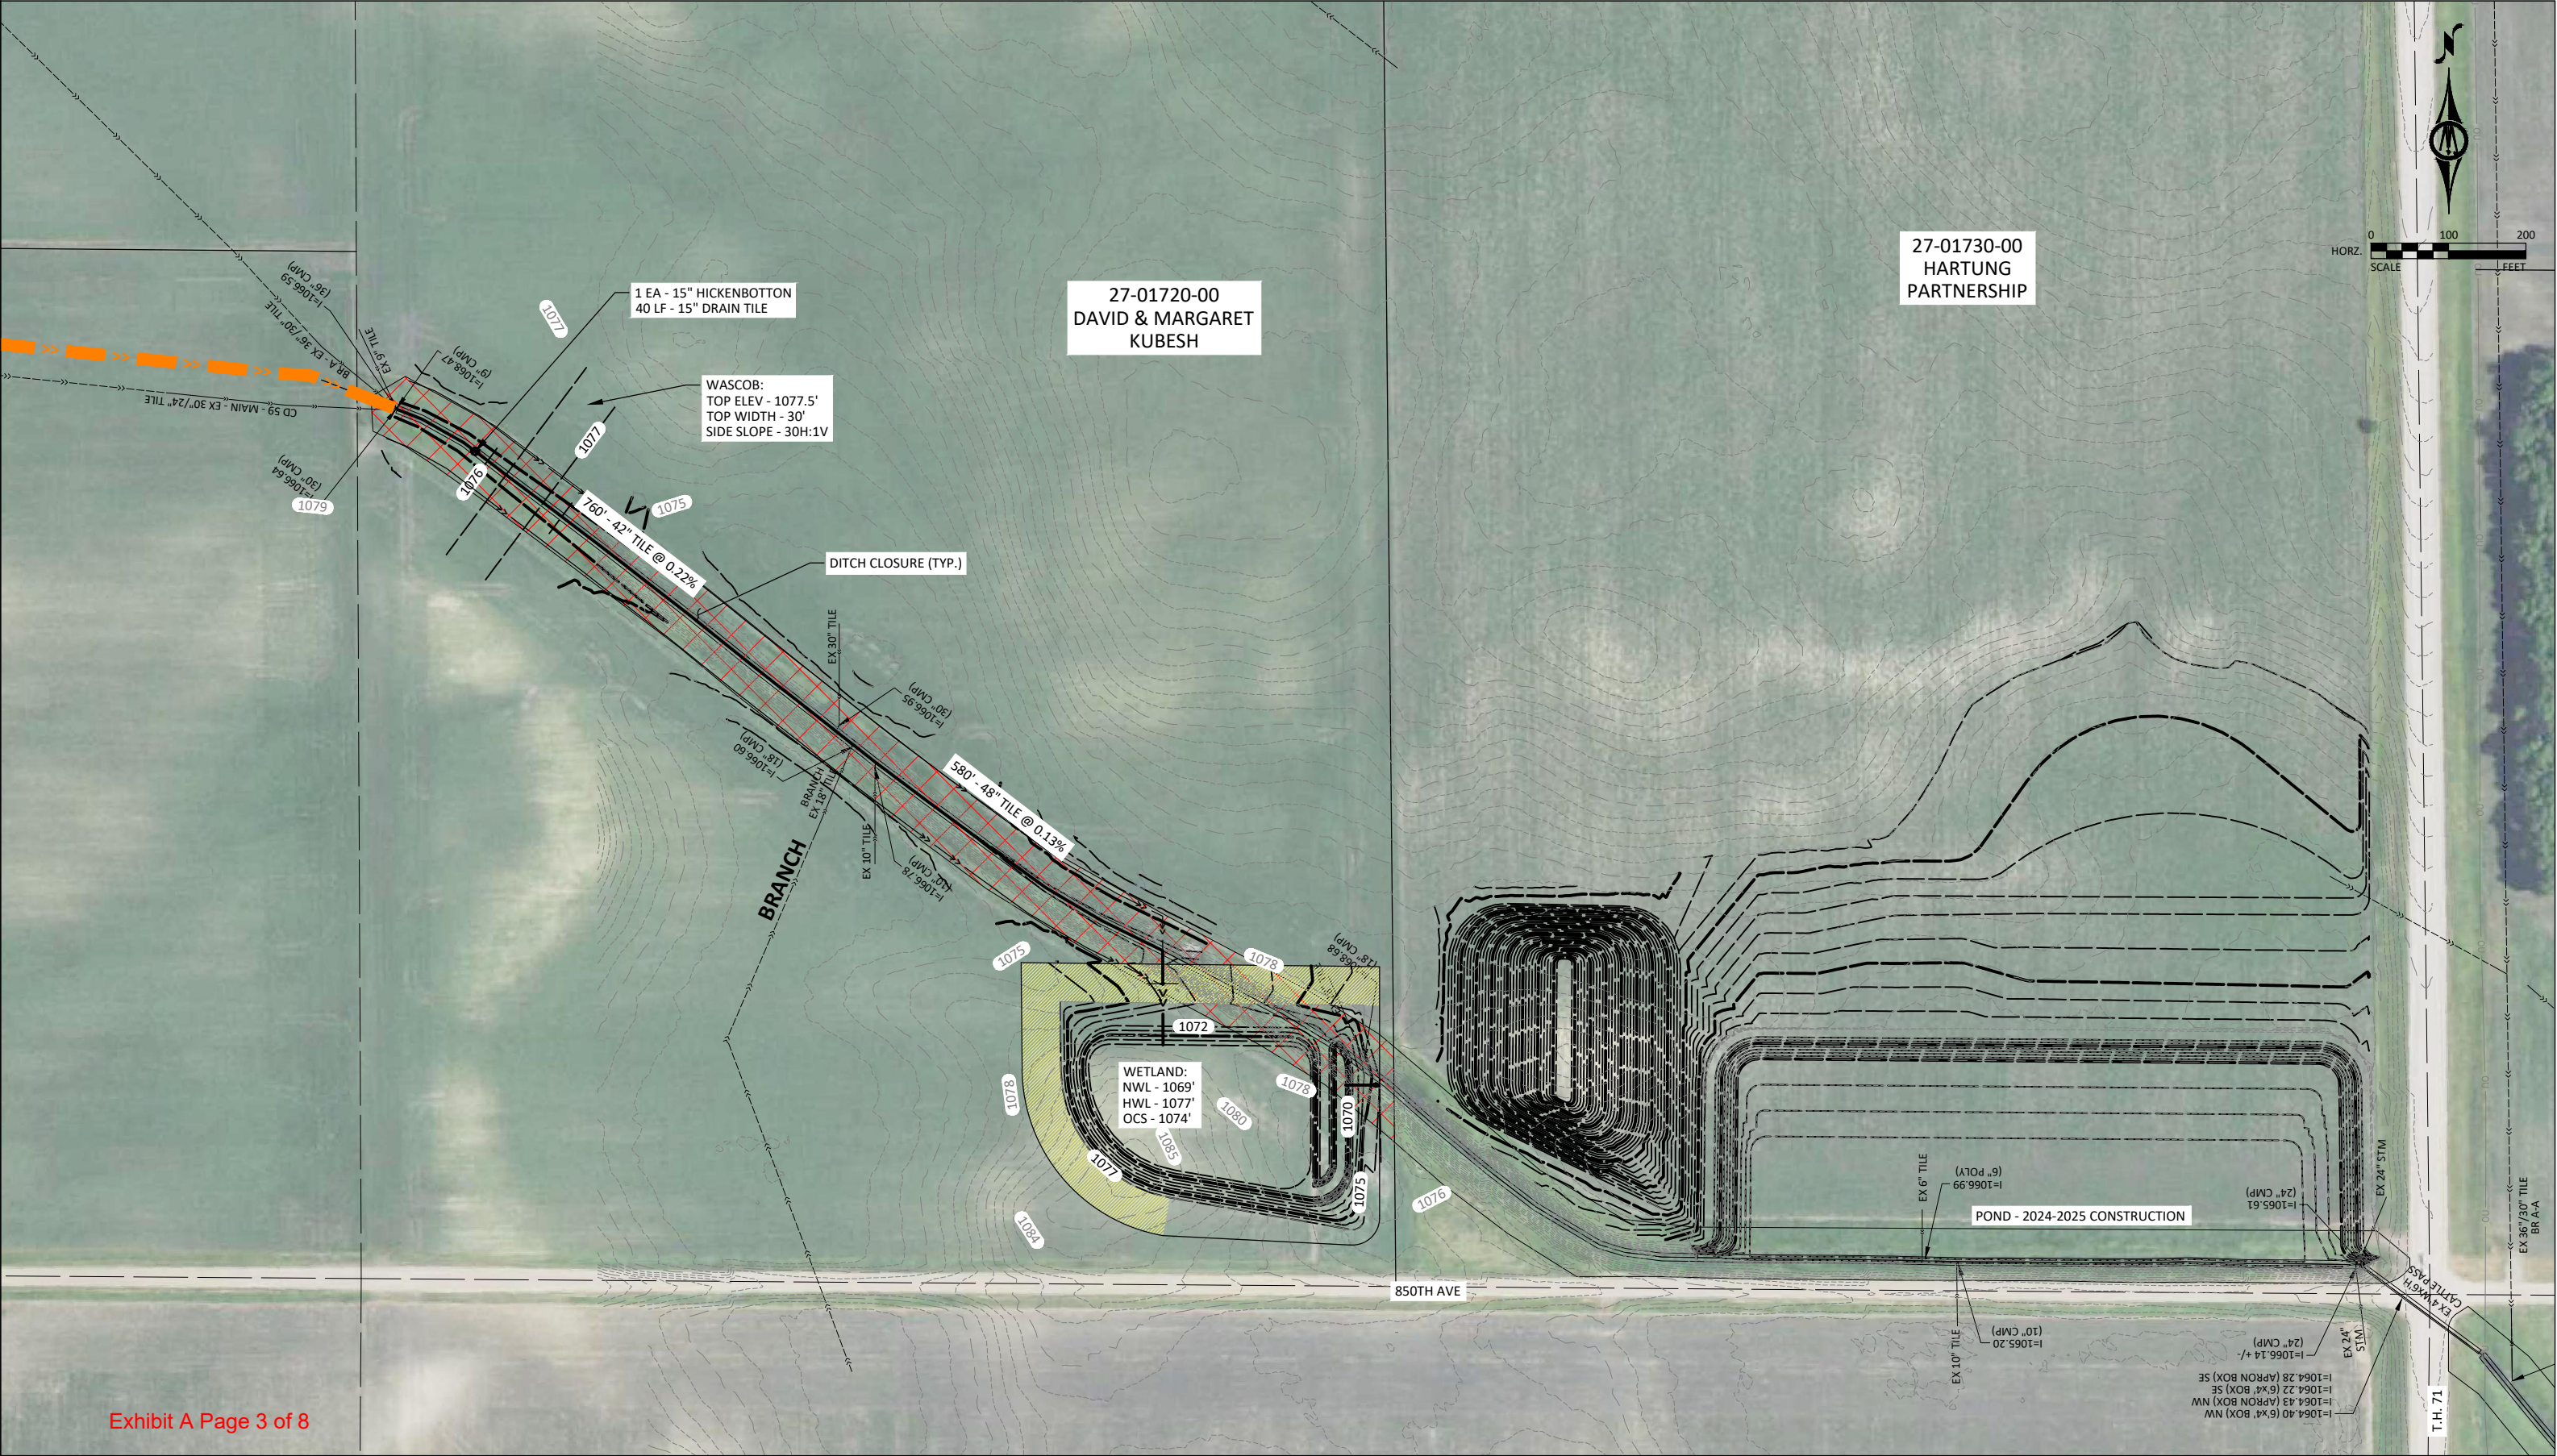


H:\RNC\0515112473\CAD\2024 GRANT APP\112473_FIGURE.dwg 7/26/2024 2:23:07 PM

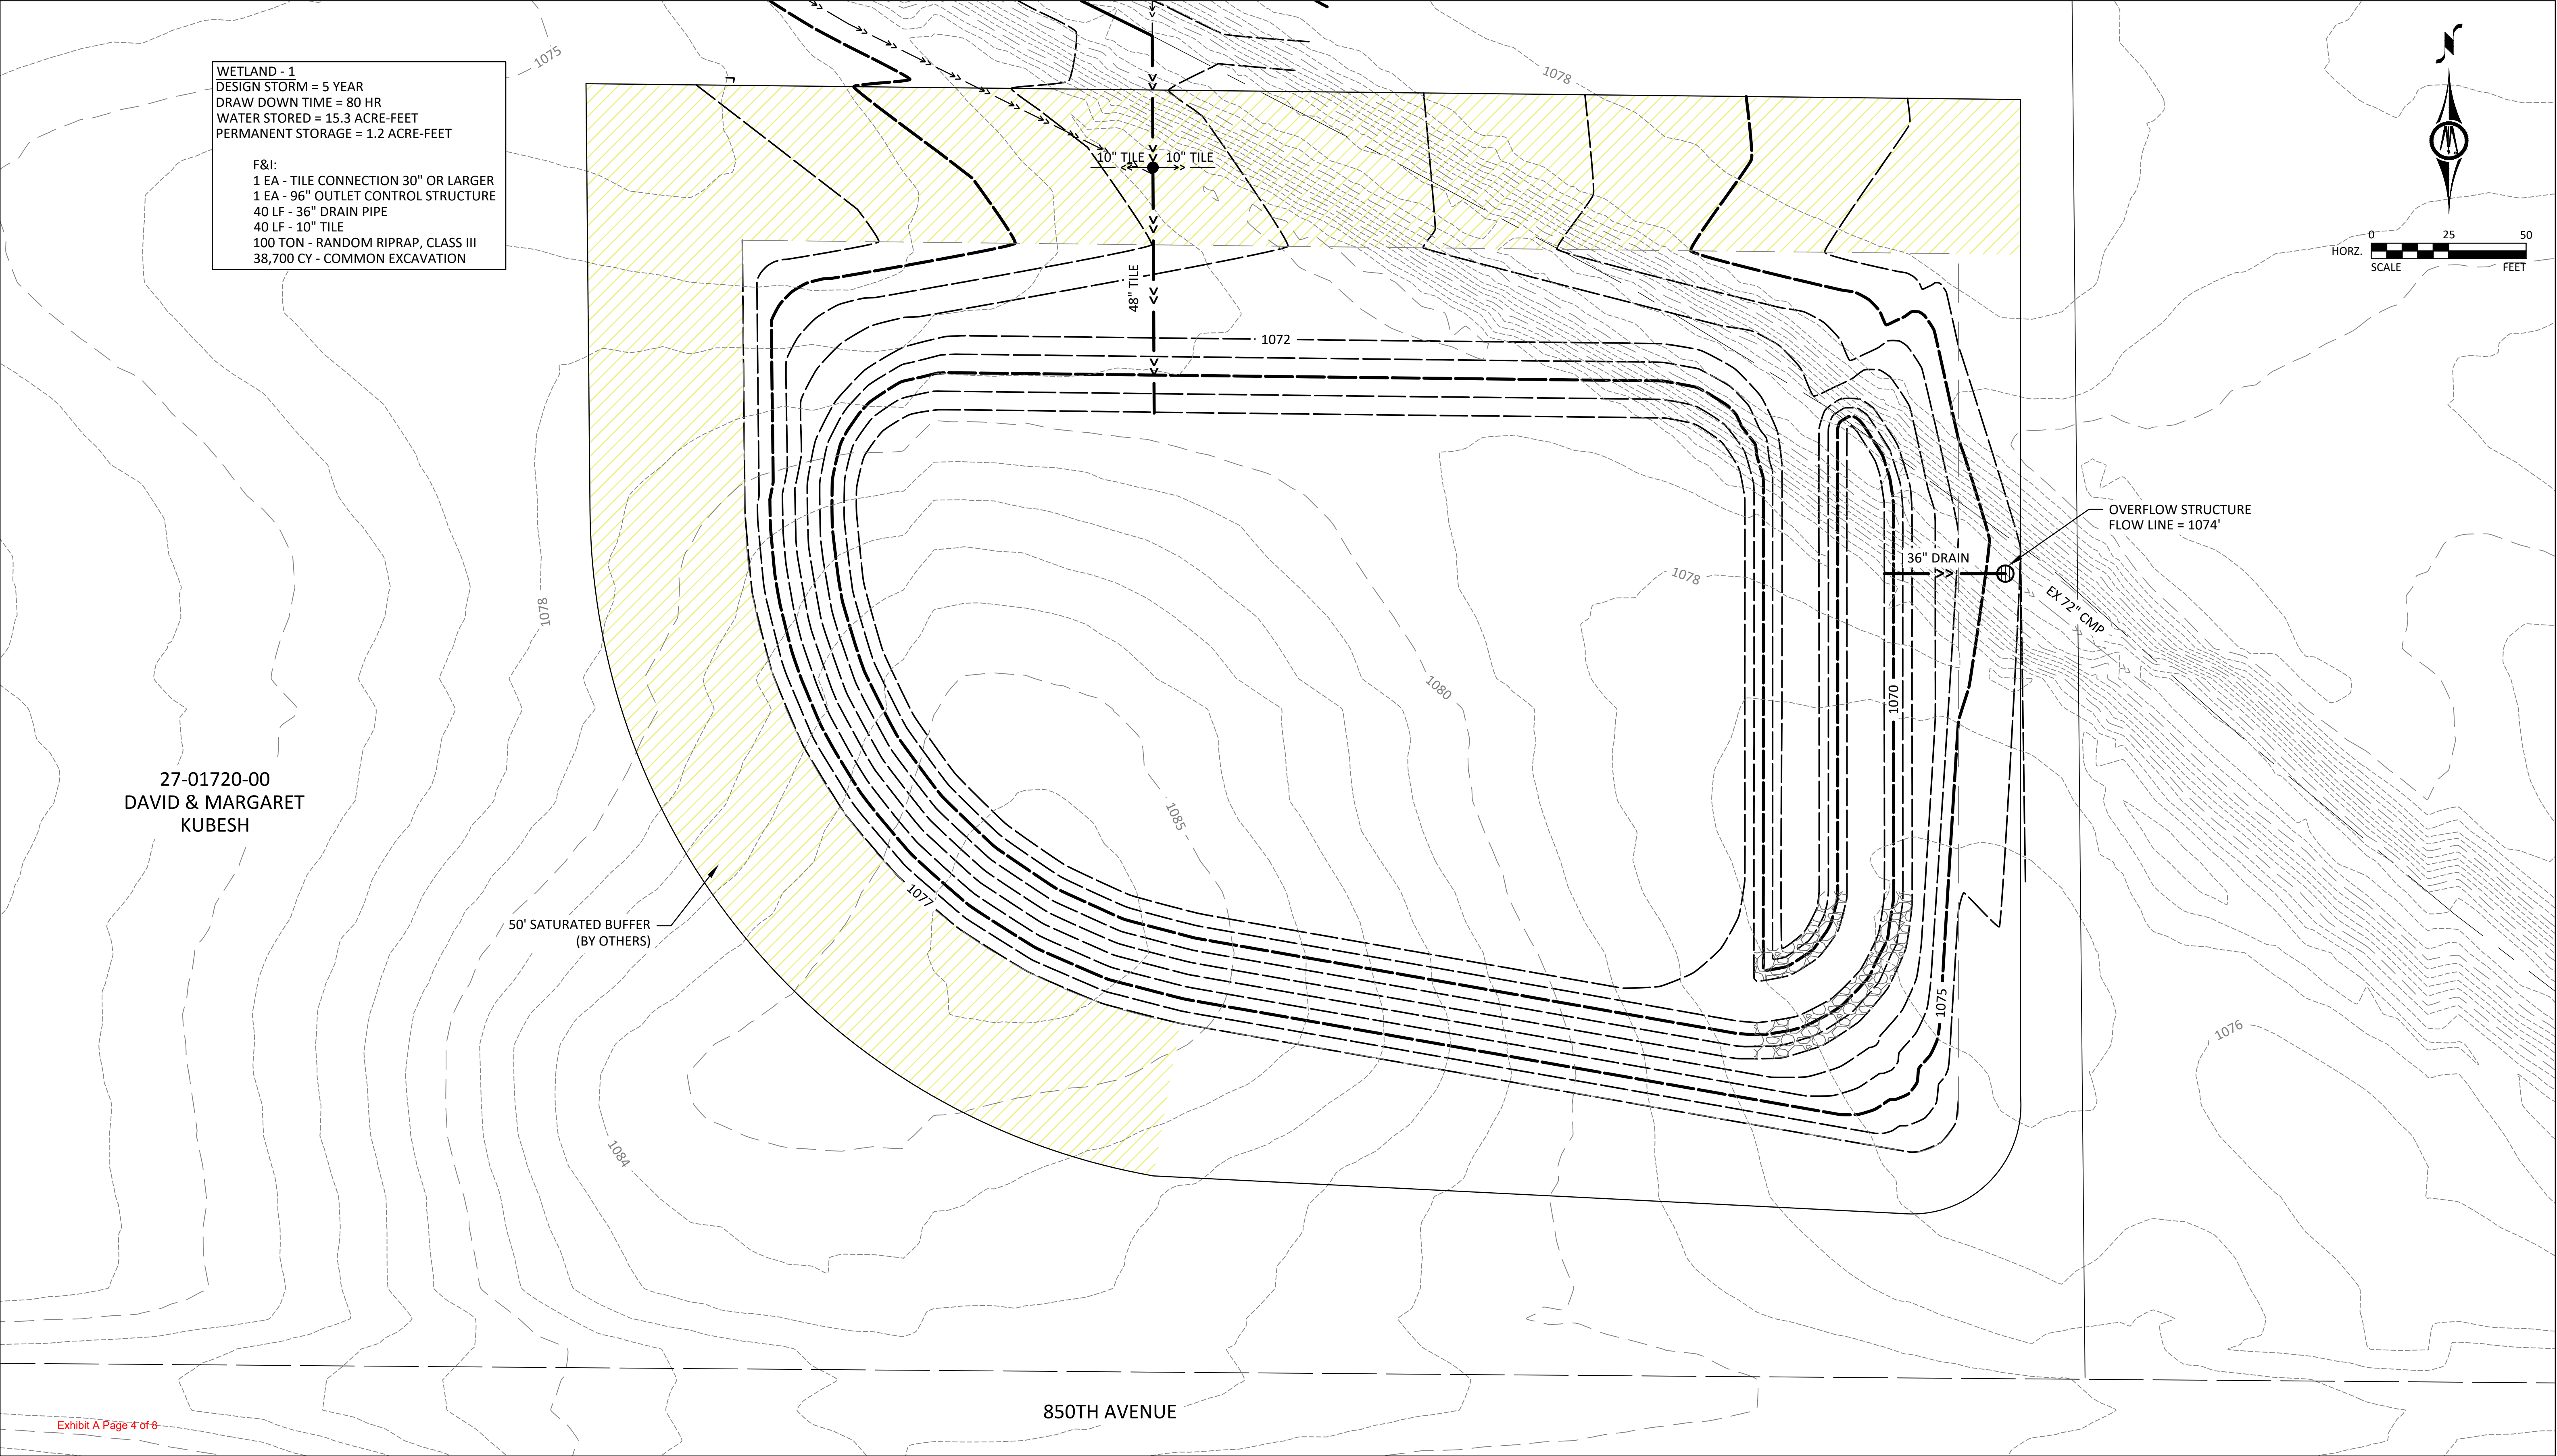


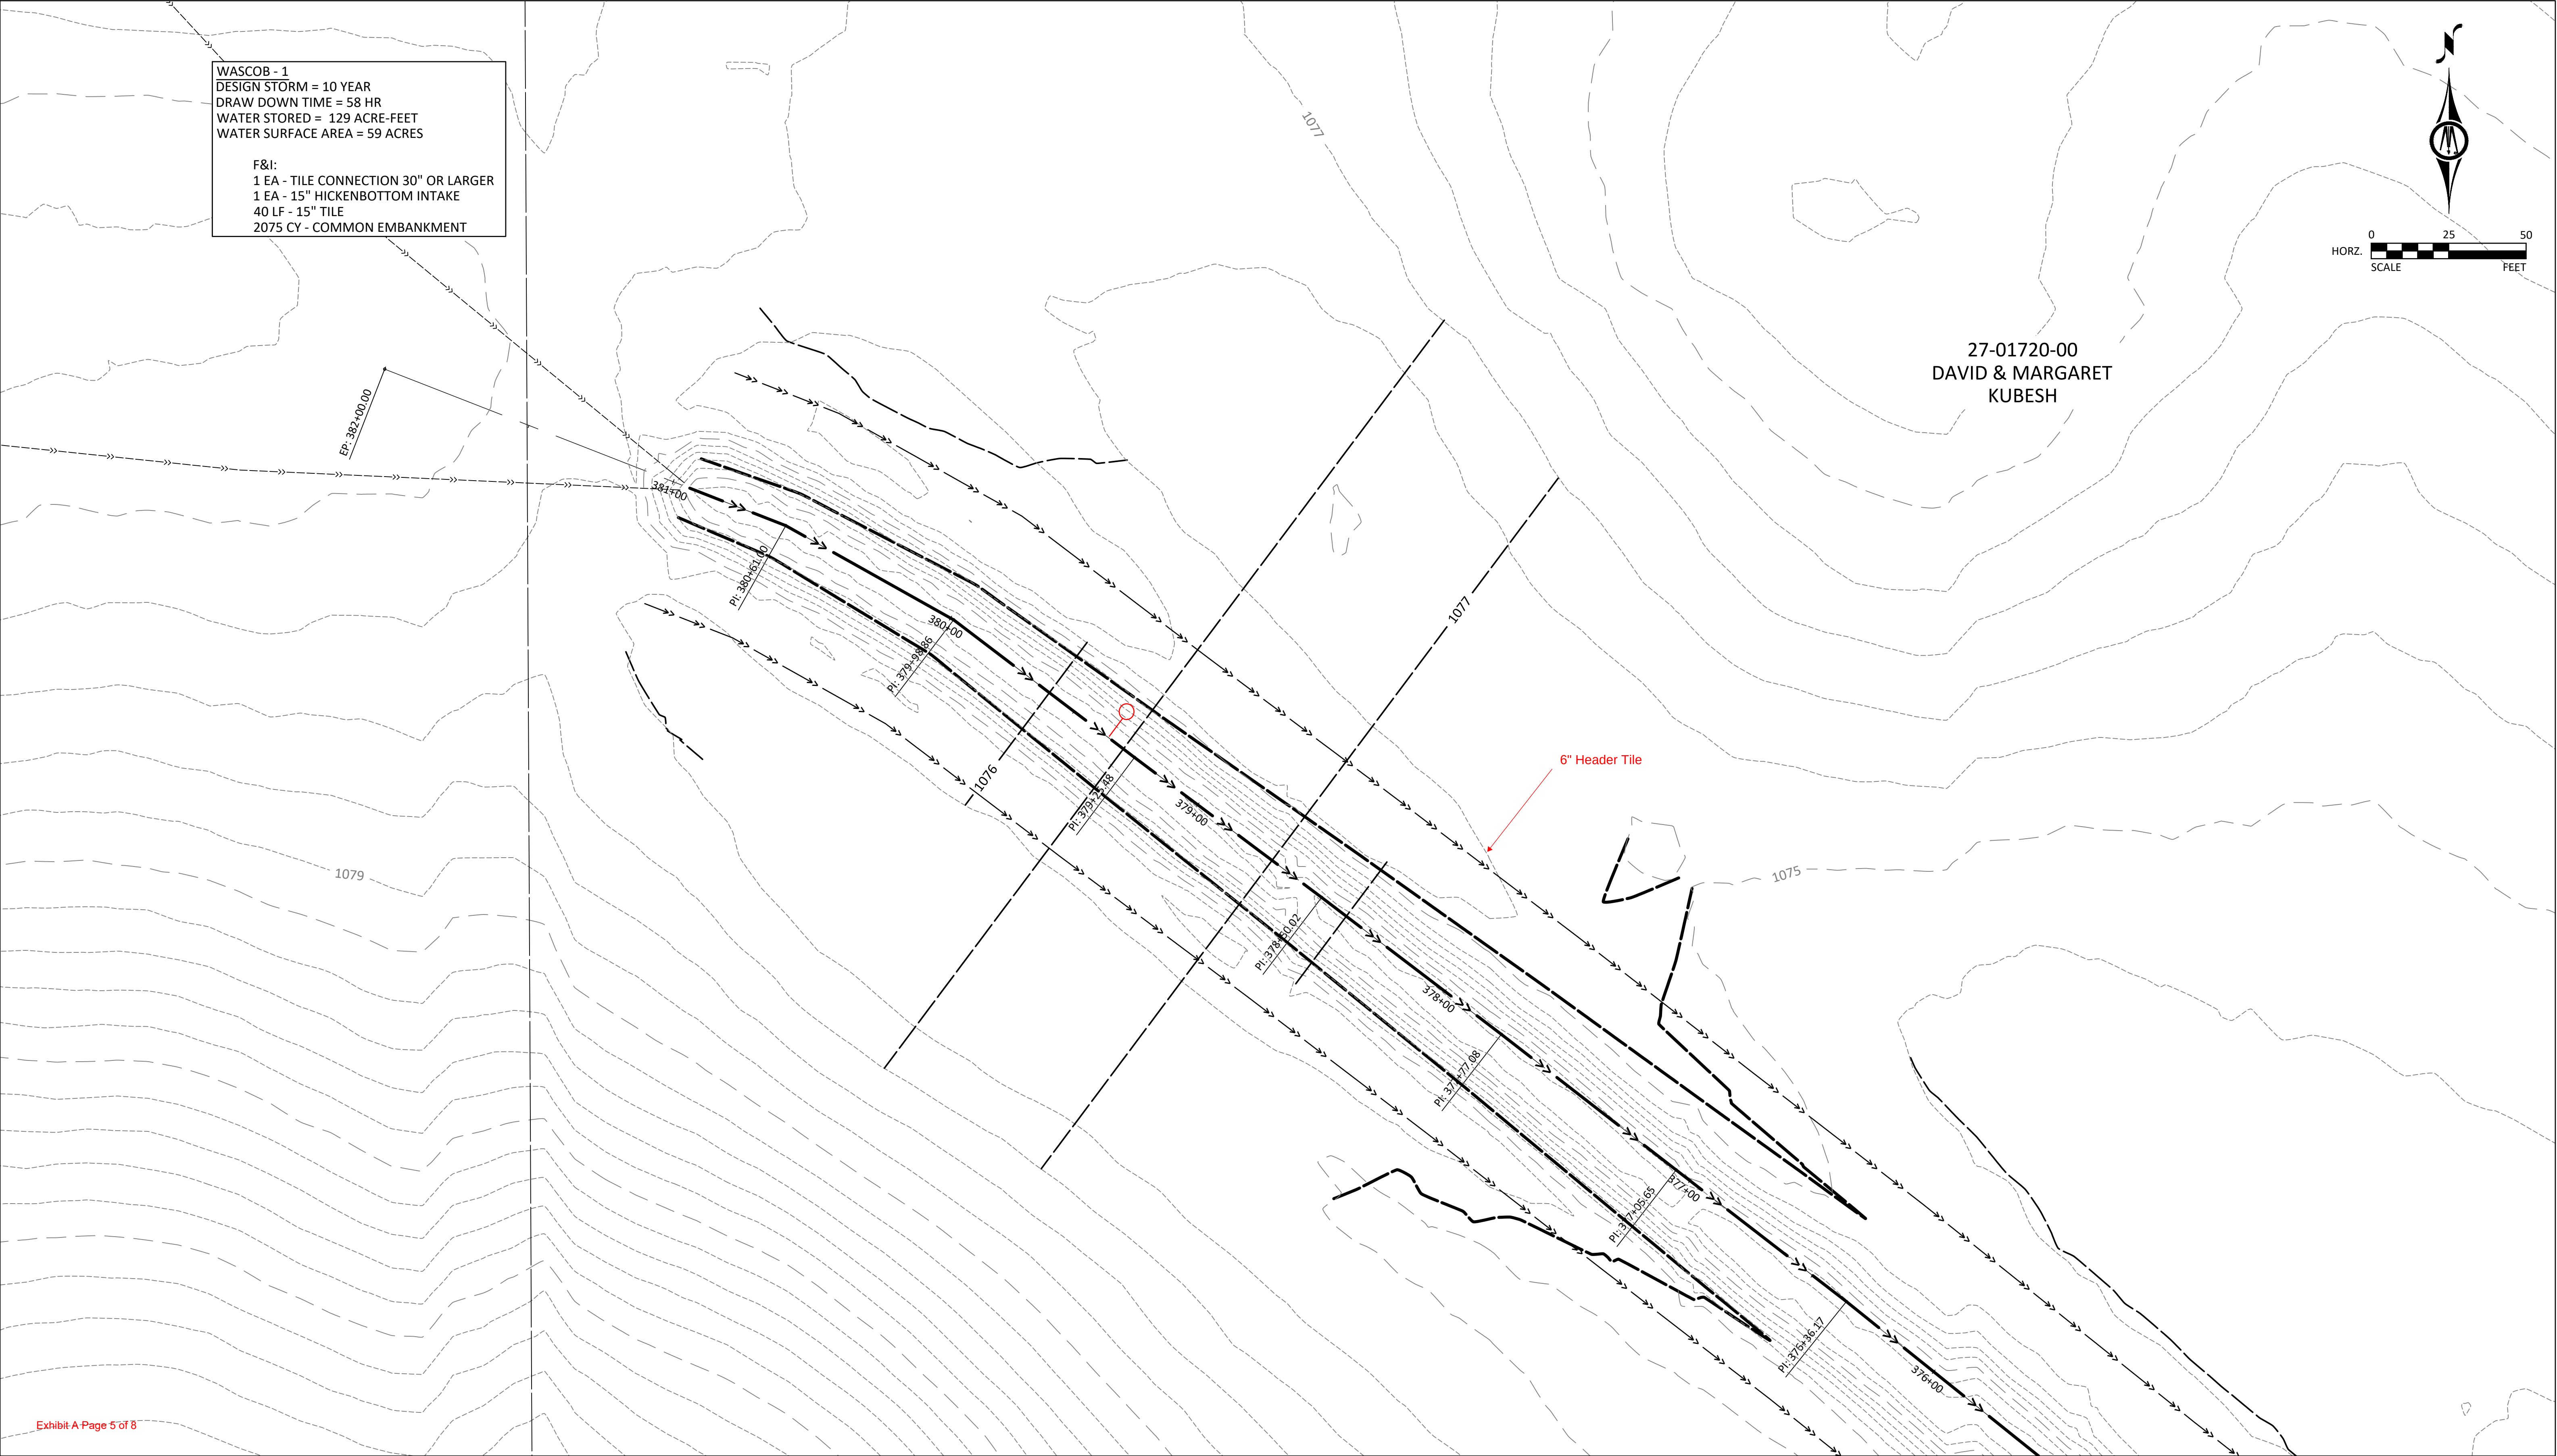

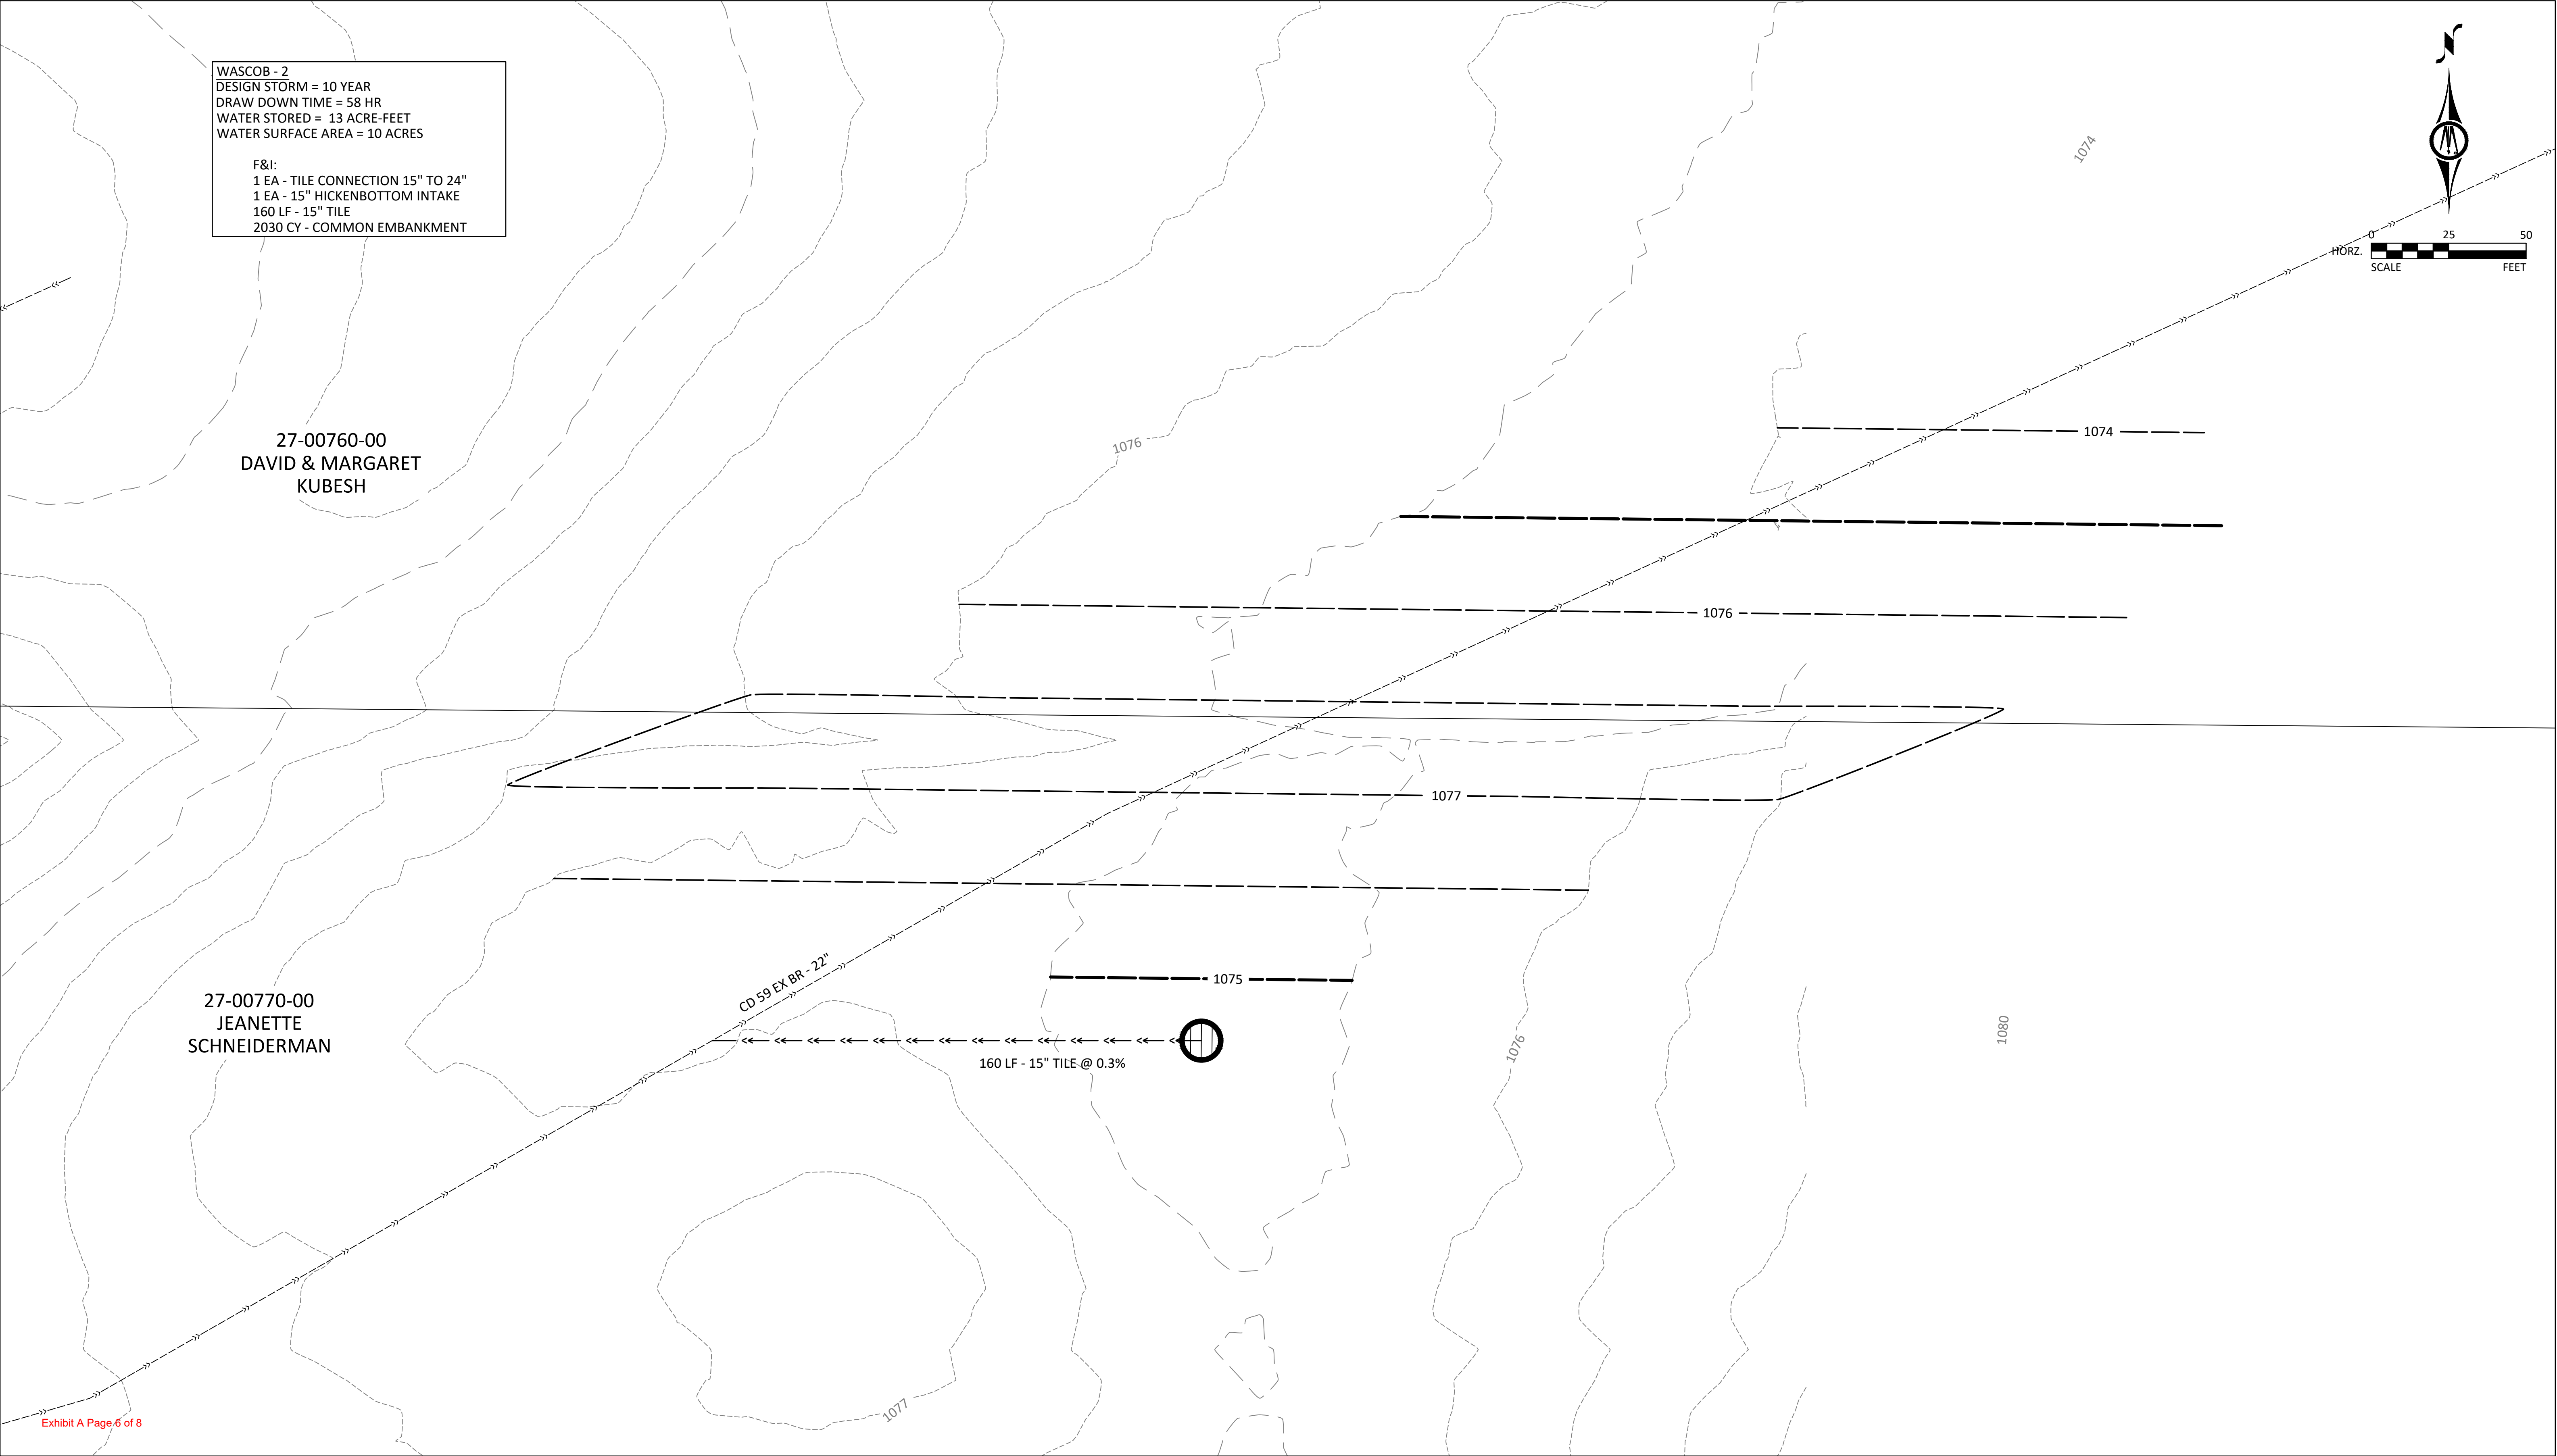

H:\RNC\15112473\CAD\2024 GRANT APP\112473_GRND_N1.dwg 7/26/2024 2:23:51 PM

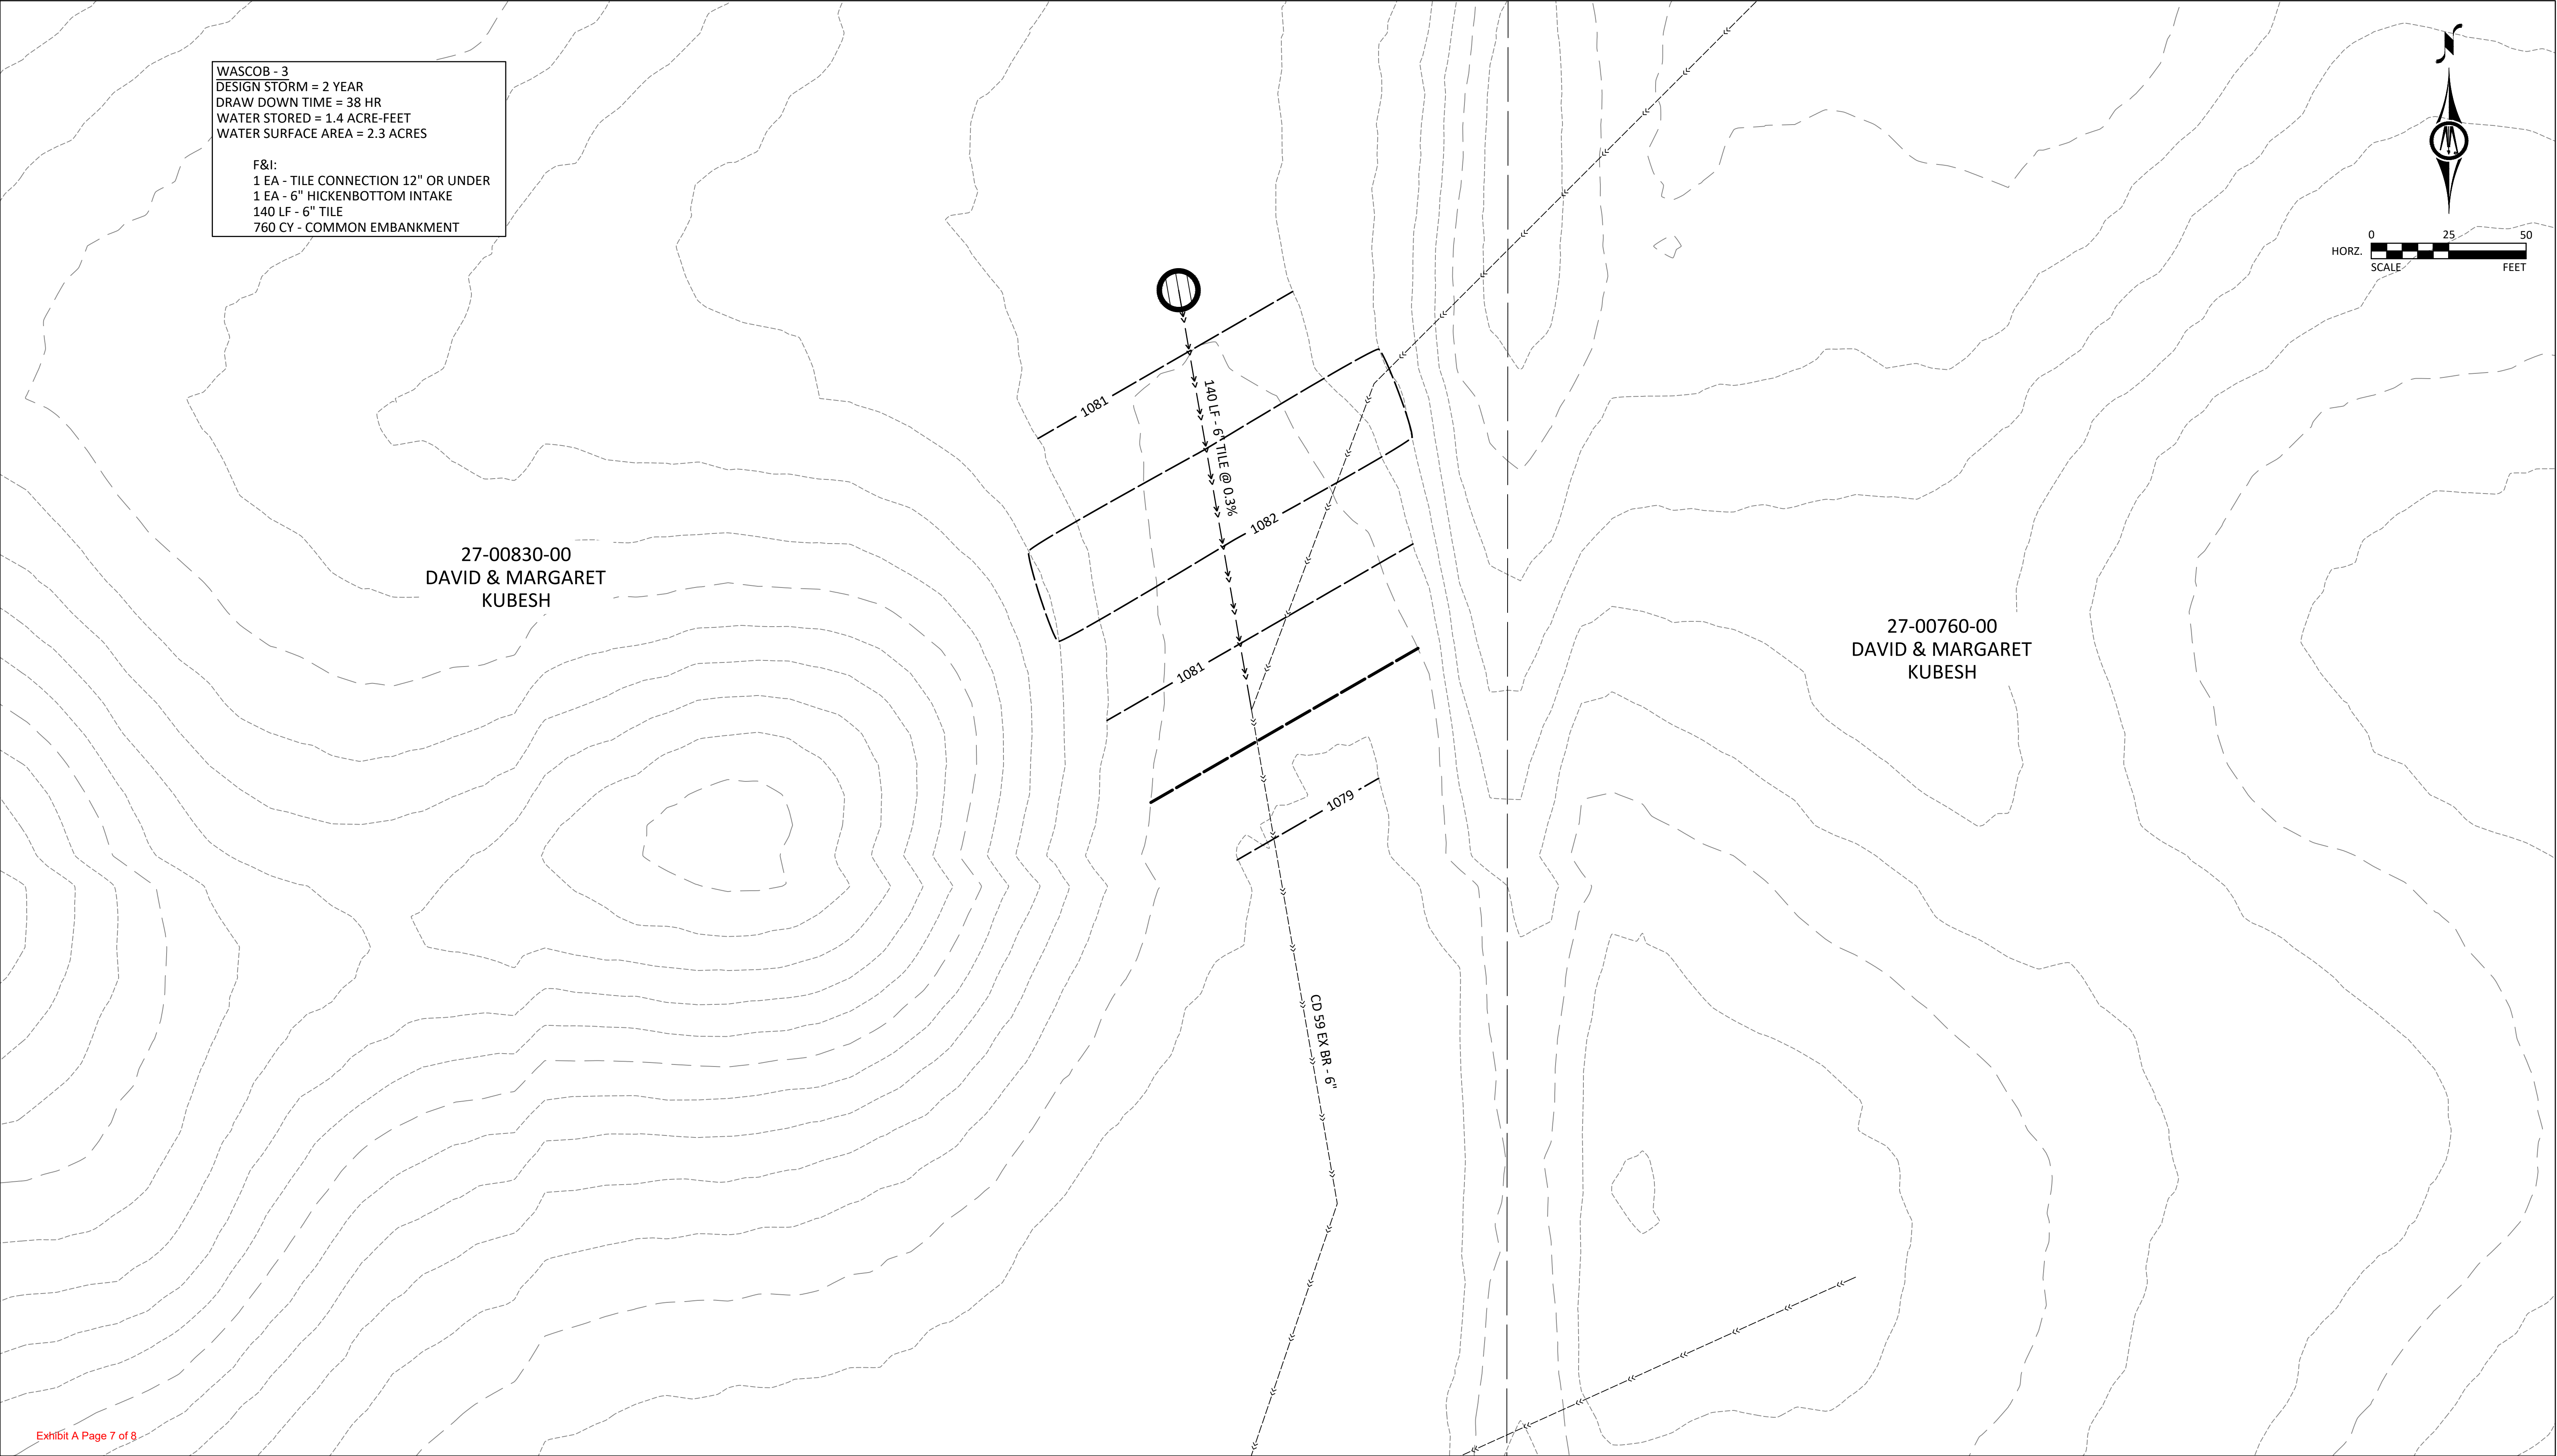

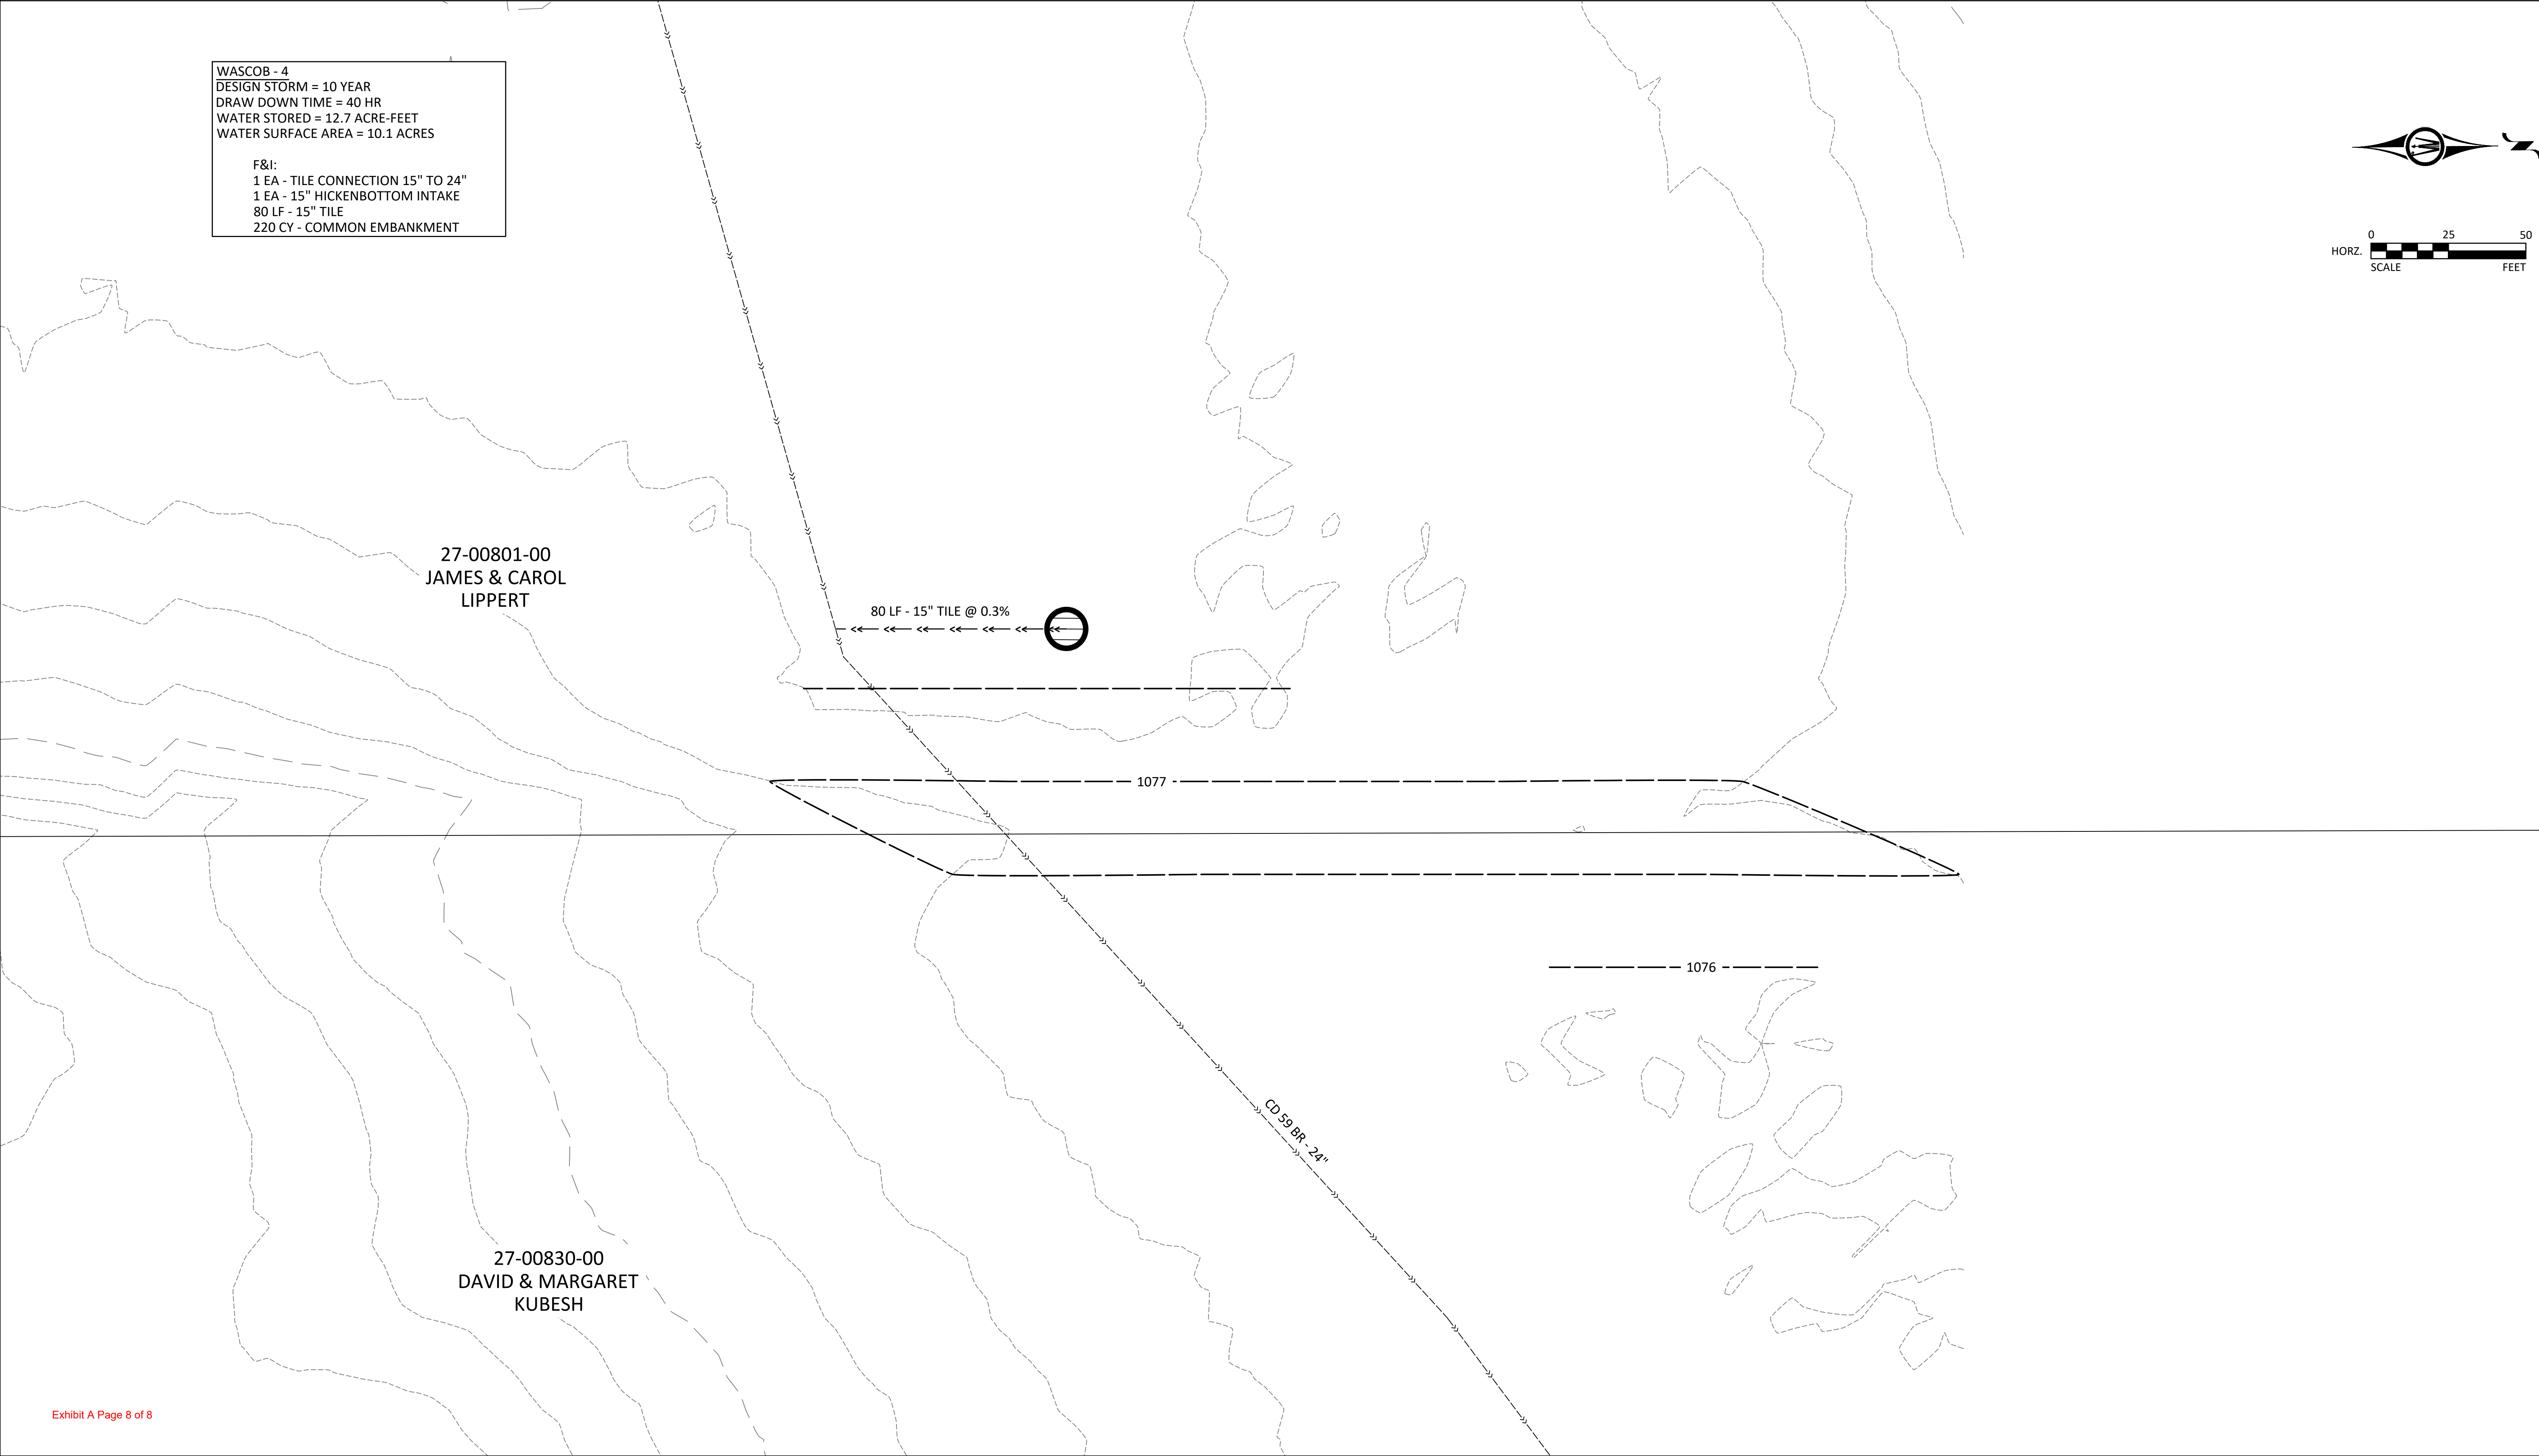

H:\R\CO\515112473\CAD\2024 GRANT APP\112473 GRND_N1.dwg 7/26/2024 2:24:09 PM

ENGINEER'S ESTIMATE

CD 59 WATER QUALITY & STORAGE
RENVILLE COUNTY, MN
BMI PROJECT NO. S15.112473



Real People. Real Solutions.

Date: 8/27/2024

Item No.	Item	Estimated Quantity	Unit	Unit Price	Total Amount
BASE BID					
1	Mobilization & Traffic Control	1	LUMP SUM	\$40,000.00	\$40,000.00
2	Exploratory Excavation	30	HOURL	\$220.00	\$6,600.00
3	Common Borrow - Ditch Closure	11,500	CU YD	\$6.00	\$69,000.00
4	Common Embankment - WASCOB	5,085	CU YD	\$6.00	\$30,510.00
5	Common Excavation - Wetland	38,700	CU YD	\$8.00	\$309,600.00
6	Tile Connections - 12" or Less	33	EACH	\$1,000.00	\$33,000.00
7	Tile Connections - 15" to 24"	2	EACH	\$1,500.00	\$3,000.00
8	Tile Connections - 30" or Larger	5	EACH	\$2,000.00	\$10,000.00
9	Granular Foundation Rock	7460	LIN FT	\$13.00	\$96,980.00
10	6" Hickenbottom Intake	1	EACH	\$1,500.00	\$1,500.00
11	15" Hickenbottom Intake	3	EACH	\$2,000.00	\$6,000.00
12	96" Outlet Control Structure	1	LUMP SUM	\$20,000.00	\$20,000.00
13	6" Non-Perforated Drain Tile	2640	LIN FT	\$20.00	\$52,800.00
14	10" Non-Perforated Drain Tile	40	LIN FT	\$24.00	\$960.00
15	15" Non-Perforated Drain Tile	280	LIN FT	\$30.00	\$8,400.00
16	24" Non-Perforated Drain Tile	5540	LIN FT	\$32.00	\$177,280.00
17	30" CM Drain	20	LIN FT	\$75.00	\$1,500.00
18	36" Heavy Duty Drain Tile	40	LIN FT	\$70.00	\$2,800.00
19	42" Heavy Duty Drain Tile	760	LIN FT	\$110.00	\$83,600.00
20	48" Heavy Duty Drain Tile	580	LIN FT	\$130.00	\$75,400.00
21	Random Riprap, Class III	100	TON	\$110.00	\$11,000.00
22	Inlet Protection	10	EACH	\$100.00	\$1,000.00
23	Sediment Control Log, Type Straw	300	LIN FT	\$3.00	\$900.00
24	Type 1 Mulch	32	TON	\$250.00	\$8,000.00
25	Permanent Seeding 1, (32-231)	1.3	ACRES	\$2,500.00	\$3,250.00
26	Permanent Seeding 2, (33-261)	1	ACRES	\$2,500.00	\$2,500.00
27	Permanent Seeding 3, (34-272)	1.2	ACRES	\$2,500.00	\$3,000.00
28	Stabalized Construction Exit	1	LUMP SUM	\$4,000.00	\$4,000.00

SUBTOTAL ESTIMATED CONSTRUCTION BID ITEMS: \$1,062,580.00

Temporary Right-of-Way Damages (Tile)	17.5	ACRE	\$600.00	\$10,500.00
Temporary Right-of-Way Damages (Open Ditch)	2.5	ACRE	\$600.00	\$1,500.00
Temporary Right-of-Way Damages (WASCOB)	1.0	ACRE	\$600.00	\$600.00
Permanent Right-of-Way (Saturated Buffer)	1	ACRE	\$16,000.00	\$16,000.00
Permanent Right-of-Way (Wetland)	3.5	ACRE	\$16,000.00	\$56,000.00

SUBTOTAL: \$1,147,180.00
10% CONTINGENCY: \$106,260.00
ENGINEERING, ADMIN & TESTING: \$212,520.00
TOTAL ESTIMATED PROJECT COST: \$1,465,960.00

REPAIR ESTIMATE

CD 59 WATER QUALITY & STORAGE
RENVILLE COUNTY, MN
BMI PROJECT NO. S15.112473



Real People. Real Solutions.

Date: 8/27/2024

Item No.	Item	Estimated Quantity	Unit	Unit Price	Total Amount
BASE BID					
1	Mobilization & Traffic Control	1	LUMP SUM	\$40,000.00	\$40,000.00
2	Exploratory Excavation	30	HOUR	\$220.00	\$6,600.00
3	Tile Connections - 12" or Less	30	EACH	\$1,000.00	\$30,000.00
4	Granular Foundation Rock	5540	LIN FT	\$13.00	\$72,020.00
5	6" Hickenbottom Intake	3	EACH	\$1,500.00	\$4,500.00
6	24" Non-Perforated Drain Tile	5540	LIN FT	\$32.00	\$177,280.00
7	30" CM Drain	20	LIN FT	\$75.00	\$1,500.00
8	Random Riprap, Class III	25	TON	\$110.00	\$2,750.00
9	Inlet Protection	3	EACH	\$100.00	\$300.00
10	Sediment Control Log, Type Straw	100	LIN FT	\$3.00	\$300.00
11	Type 1 Mulch	32	TON	\$250.00	\$8,000.00
12	Stabalized Construction Exit	1	LUMP SUM	\$4,000.00	\$4,000.00

SUBTOTAL ESTIMATED CONSTRUCTION BID ITEMS: \$347,250.00

Temporary Right-of-Way Damages (Tile)	17.5	ACRE	\$600.00	\$10,500.00
---------------------------------------	------	------	----------	-------------

SUBTOTAL:	\$357,750.00
10% CONTINGENCY:	\$34,730.00
ENGINEERING, ADMIN & TESTING:	\$69,450.00
TOTAL ESTIMATED PROJECT COST:	\$461,930.00